



**TWO (2) NEW CHOICES FOR EXTREME FLUX RECOVERY WITH FULLY AUTOMATIC OPERATION!**

**INTRODUCING THE: MIGHTY-MAC-3000X (4 HP) AND THE MIGHTY-MAC-5000X (5.5 HP)**

**TO SEE ALL OUR PRODUCTS, VISIT US AT OUR WEB SITE : [WELDENGINEERING.COM](http://WELDENGINEERING.COM)**

The new **Mighty-Mac-3000X** and **Mighty-Mac-5000X** heavy duty flux recovery vacuum and dust collector offers **great new features**: ● **EXtremely** rugged and durable. ● **EXtremely** easy to maintain because large door to filters open with the flick of latches, and all internal covers are easily removed. ● **EXtremely** safe; micron filters remove particles below one (1) micron, making the air you breath much cleaner. ● The **Mighty-MacX** System also provides **auto sensing** dust cleaning logic. The filters are always **automatically** pulse cleaned as they become dirty (with no operator input)!

**MIGHTY-MAC SPECIFICATIONS:**

- **Weight:**  
**MM-3000X (4 HP):** 325 lbs (147.4 Kg)  
**MM-5000X (5.5 HP):** 331 lbs (150.1 Kg)
- **Dimensions** (Both MM-3000X and MM-5000X): 34" (86.4 cm) H x 31" (78.7 cm) W x 25" (63.5 cm) D
- **Electrical input:** Available for 200-230, 460, 575 Vac; 3PH; 60 Hz or 220, 380-415 Vac; 3PH; 50 Hz
- **Compressed air** (for filter cleaning only): < 1 cfm @ 70-100 psi (use min. 1/4" I.D. hose).
- **NOTE:** Hose, valves, flux separators and other flux storage and feed accessories must be ordered separately. **Please request "TB-MM-708", Systems Manual** for complete system configuration information. ( **Please contact factory for ordering assistance.** )

Mighty-Mac 3000X or 5000X




HFH-100  
2" Vacuum hose to Mighty-Mac vacuum



**Optional HFH-100** heated hopper (250 °F, 121°C) automatically gravity feeds recovered flux to lower welding system hopper. System available with magnetic separator, unheated and in different flux capacities (i.e. 200 lbs, 300 lbs, 600 lbs, 1000 lbs etc. ). Must be used with Mighty-Mac vacuum.

**"Mighty-Mac 3000X/P or 5000X/P"** Heavy duty vacuum unit only. Same as above, except that instead of a dust drawer, dust filter chamber has a hopper bottom. This enables continuous dumping of dust to a much larger dust container (i.e. optional FD-55 dust drum ).

**For ordering information please contact:**

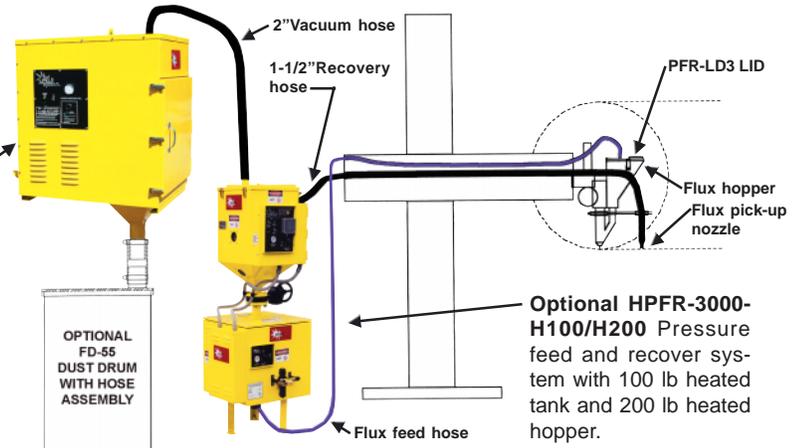

34 Fruit St.  
 Shrewsbury, MA 01545 (U.S.A.)  
 Telephone: (508) 842-2224  
 Fax: (508) 842- 3893  
 Web site: [weldengineering.com](http://weldengineering.com)  
 email: [sales@weldengineering.com](mailto:sales@weldengineering.com)

**FOR OTHER OPTIONAL ACCESSORIES:**

- **Please request "TB-MM-708" Systems Manual** for complete system configurations. ( **Please contact the factory for ordering and engineering assistance.** )